

# XVBC21

Indicating Bank, 70mm, base unit and cap,  
direct or tube mounting, bottom or side cable  
entry



Product availability: Stock - Normally stocked in distribution facility



## Main

Range of product	Harmony XVB Universal
Product or component type	Base unit with cover
Component name	XVBC
Material	Glass reinforced polyamide base unit Polycarbonate cover unit

## Complementary

Fixing mode	Direct or tube fixing
Mounting diameter	2.76 in (70 mm)
Product destination	Banks without flash discharge tube unit
Electrical connection	1 connector standard input
Cable entry	Bottom or side entry
Assembly style	Customer assembly, up to 5 units
Terminals description ISO n°1	(GND)GROUND (COM-1)PW (COM-4)PW (COM-3)PW (COM-5)PW (COM-2)PW
Net weight	0.42 lb(US) (0.19 kg)

## Environment

Product certifications	CCC UL 508 GOST CSA C22-2 No 14
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
NEMA degree of protection	NEMA 4X UL 508 indoor)

## Ordering and shipping details

Category	22611 - XVB-STACKLIGHTS
Discount Schedule	XV
GTIN	00785901845027
Package weight(Lbs)	0.20 kg (0.45 lb(US))
Returnability	Yes
Country of origin	ID

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


## Contractual warranty

Warranty	18 months
----------	-----------

## Indicator Bank without "Flash" Discharge Tube Unit

### Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

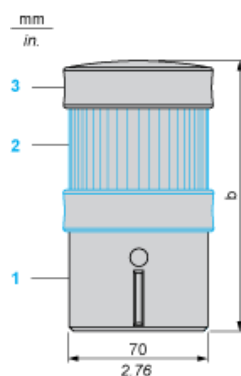


- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC..., to be ordered separately
- (3) Cover (supplied with base unit)

Number of illuminated or audible signalling units (no "flash")	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

## Base Unit for Indicator Banks

### Panel Cut-out for Direct Fixing



## Illuminated Beacon

### Wiring Diagram

